

# Heavy Duty

## HINGED SYSTEM (PD/W)

This Parking Deck system is rated for low speed vehicular traffic and commonly placed in parking deck applications. The integral hinge allows for vertical offset up to an inch and a half.

### FEATURES

**COORDINATING CORNERS** Available with corner option for a complete floor solution.

**TRAFFIC LOAD** Vehicular rated for slow vehicular traffic in parking decks, garages and ports.

**DURABLE** Constructed with a heavy-duty, hinged, cover plate with limited vertical movement.

### DETAILS

**MATERIAL** 6063-T6 Aluminum

**FINISH** Mill

#### MOVEMENT

- Thermal: Horizontal and Vertical

**MOUNTING** Surface

**JOINT SIZE** 2 inches to 6 inches



**LENGTH** 10 Linear Feet

**APPLICATION** Interior or Exterior

**LOAD** Vehicle

**INSTALLATION** Floor or Deck

**OPTIONS** Moisture Barrier, Fire Barrier

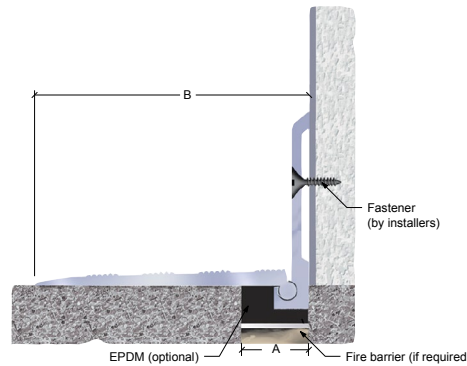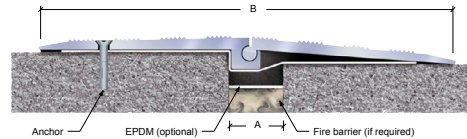

### MODELS

#### DECK-TO-DECK

MODEL	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
PD-200	2" (50mm)	8" (203mm)	2" (50mm)
PD-300	3" (75mm)	13.125" (333mm)	4" (100mm)
PD-400	4" (100mm)	16" (406mm)	5.5" (140mm)
PD-600	6" (150mm)	19.8" (503mm)	8" (203mm)

#### DECK-TO-WALL/CORNER

MODEL	JOINT SIZE AT MEAN T°F	SYSTEM WIDTH	TOTAL MOVEMENT
PD-200W	2" (50mm)	5" (127mm)	2.5" (64mm)
PD-300W	3" (75mm)	7" (178mm)	3.5" (87mm)
PD-400W	4" (100mm)	11" (279mm)	4.5" (112mm)